


DS-2CD2620F-I(S) (2.0MP)/DS-2CD2632F-I(S) (3MP)


VF IR Bullet Network Camera

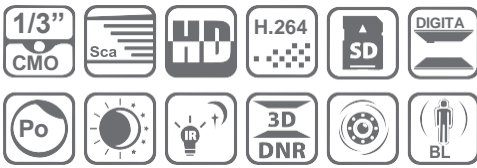

Key features

- 2.0MP / 3MP high resolution
- HD real-time video
- Vari-focal lens
- IR range: up to 30m
- DWDR & 3D DNR & BLC
- IP66
- Onboard storage (up to 64GB)
- (-S) Audio I/O, Alarm I/O

Dimensions

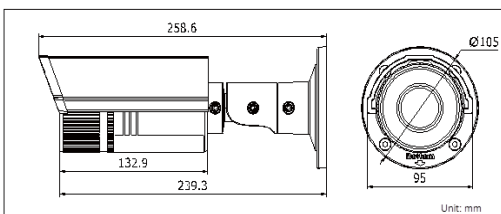

Accessories



DS-1275ZJ
Vertical pole mount



DS-1260ZJ
Junction box

Available models

DS-2CD2620F-I, DS-2CD2620F-IS
DS-2CD2632F-I, DS-2CD2632F-IS

* -S: 2-ch audio I/O interface, 2-ch alarm I/O interface

	DS-2CD2620F-I (S)	DS-2CD2632F-I (S)
Camera		
Image sensor	1/3" Processor EXMOR CMOS TI DAVINCE Linux processor	
Min. illumination	0,2 lux F1.2 Color, 0.01lux F1.2 p&b,0luxwithIR AGC / ATW Auto/Manual	
Shutter time	1/3s ~ 1/100,000s	
Lens	2.8~12mm @F1.4, angle of view:98.4°~30.2°	2.8 - 2 mm @ F1.4, Angle of view: 91.2°-28.3°
Lens mount	Φ14	
Day & night	ICR	
Digital noise reduction	3DDNR	
Wide dynamic range	Digital WDR	
Backlight	Yes, zone confi	
Compensation	Standard	
Compression	Standard	
Video compression	H.264 / MJPEG	
H.264 codec profi	Main profi	
Bit rate	32Kbps ~ 12Mbps	
Audio compression	G.711 / G.722.1/ G.726 / MP2L2	
Audio bit rate	64 Kbps (G.711) / 16Kbps (G.722.1) / 16 Kbps (G.726) / 32-128 Kbps (MP2L2)	
Image		
Max. Image Resolution	1280 x 960	2048 x 1536
Frame rate	50Hz: 25 fps (1280 x 960), 25 fps (1280 x 720), 25 fps (704 x 576), 25 fps (640 x 480) 60Hz: 30 fps (1280 x 960), 30 fps (1280 x 720), 30 fps (704 x 576), 30 fps (640 x 480), 30 fps (704 x 480), 30 fps (352 x 240) NTSC	50Hz: 20fps (2048 x 1536), 25fps (1920 x 1080), 25fps (1280 x 720) 60Hz: 20fps (2048 x 1536), 30fps (1920 x 1080), 30fps (1280 x 720) NTSC
Image settings	Rotate mode, Saturation, brightness, contrast, sharpness adjustable through client software or web browser	
ROI	Support	
Network		
Network storage	NAS (Support NFS, SMB/CIFS)	
Alarm trigger	Line Crossing, Intrusion Detection, Motion detection, Tampering alarm, Storage exception	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour	
System compatibility	ONVIF, PSIA, CGI, ISAPI, IE, Chrome, Mozilla, IOS, Android, Windows Phone	
General functionalities	Flickerless, heartbeat, mirror, privacy mask, watermark, IP address filtering, Anonymous access, 10 Users	
Interface		
Communication	1 RJ45 10M/100M Ethernet port / Bnc Connection	
Interface	Built-in Micro SD / SDHC / SDXC card slot, up to 64GB	
Onboard storage		
General		
Operating conditions	-30°C ~ 90°C humidity 95% or less (non-condensing), Protection surge	
Power supply	12VDC ± 10%, PoE (802.3af)	
Power consumption	Max. 5.5W (7.5W with ICR on)	
Ingress protection level	IP66	
IR range	Up to 30m, Db Los <50	
Dimensions	95x105x258.6 mm (3.74" x 4.13" x 10.18")	
Weight	1200g	

